




# Magellan RoadMate 1440 Antenna Replacement

This guide will illustrate how to replace the device's antenna.

Written By: Benton Burns

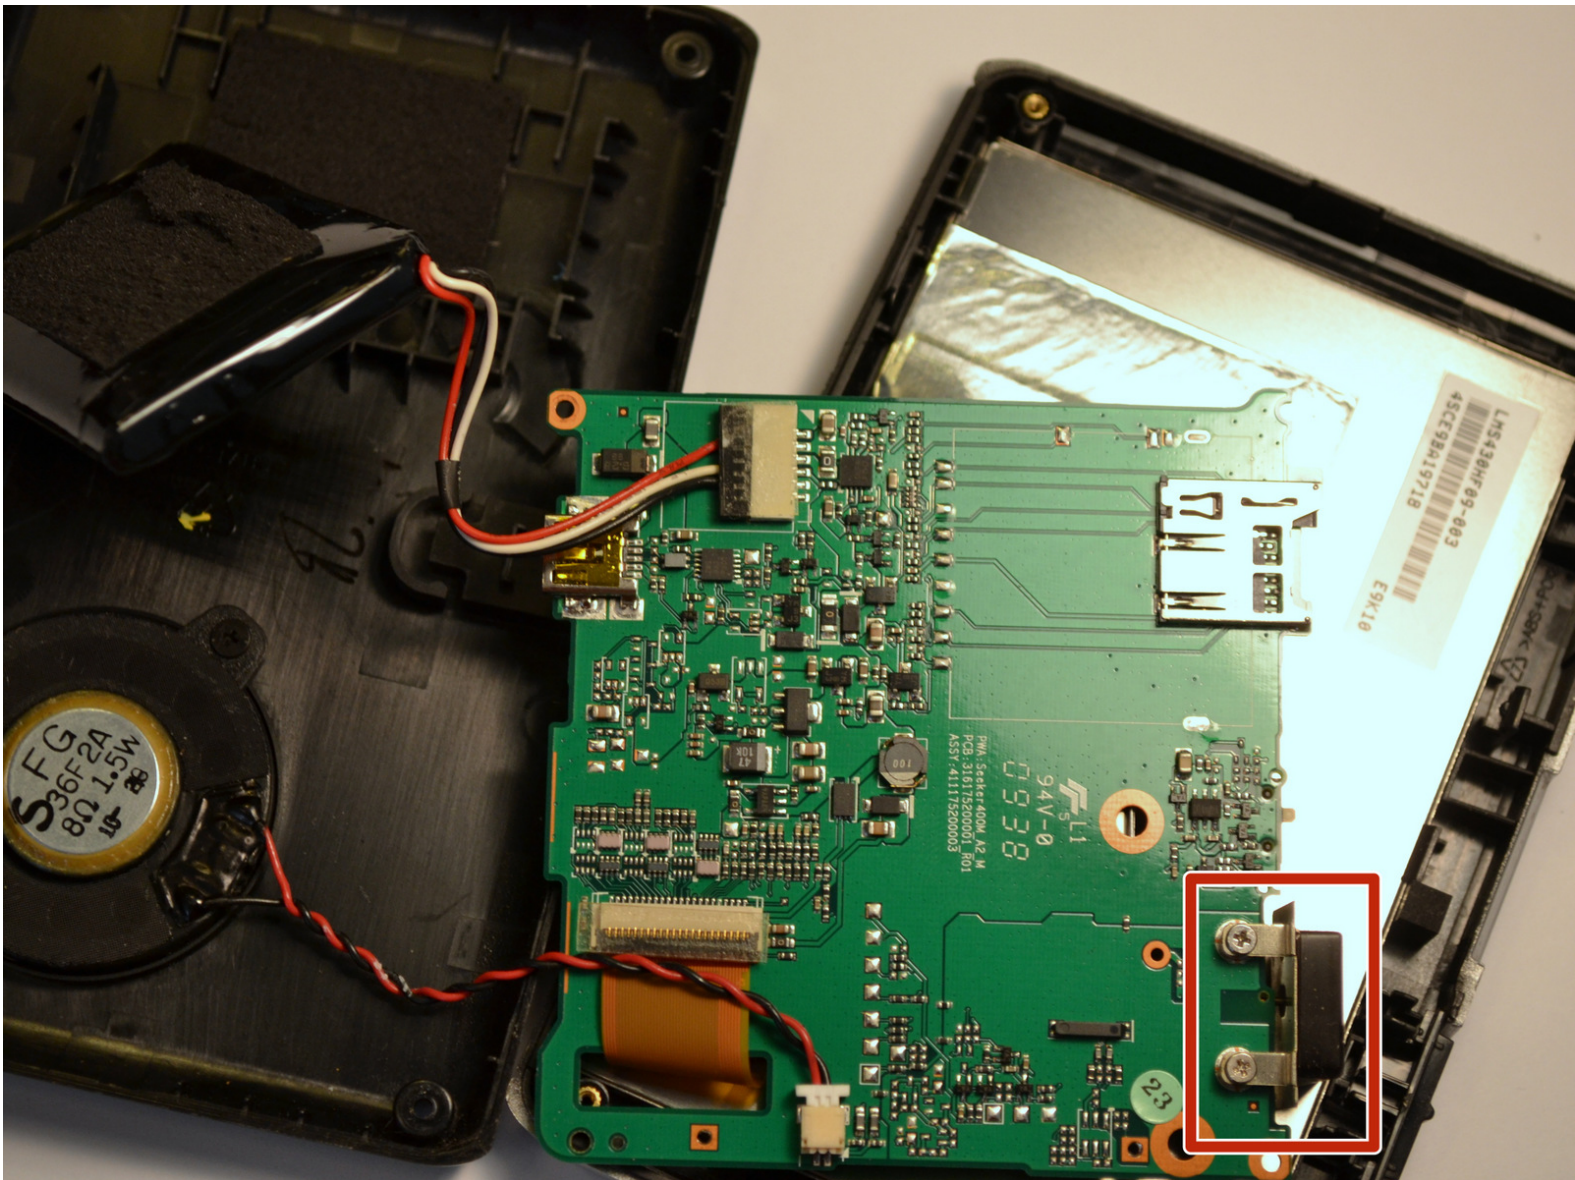

## INTRODUCTION

This guide will illustrate how to replace the device's antenna.

---



### TOOLS:

- [Heavy-Duty Spudger](#) (1)
  - [Phillips #0 Screwdriver](#) (1)
  - [Portable Soldering Iron](#) (1)
-

## Step 1 — Magellan RoadMate 1440 Back Cover Disassembly



- Place the GPS with the screen facing down.

## Step 2



- Locate the four screws in the back cover of the device. Use a Phillips #0 screwdriver to remove all four 4.2mm Phillips #0 screws.




## Step 3




- Locate the screws at the bottom of the device. Use a Phillips #0 screwdriver to remove the two 4.2mm Phillips #0 screws.

## Step 4

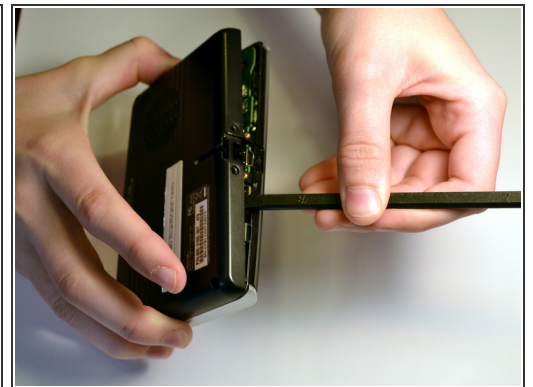


- Insert the black spudger into the crease in the side of the GPS.
- Move the end of the spudger down to break the seal between the two plastic shells.
- Continue doing this along each side of the GPS to ensure a smooth removal.


## Step 5

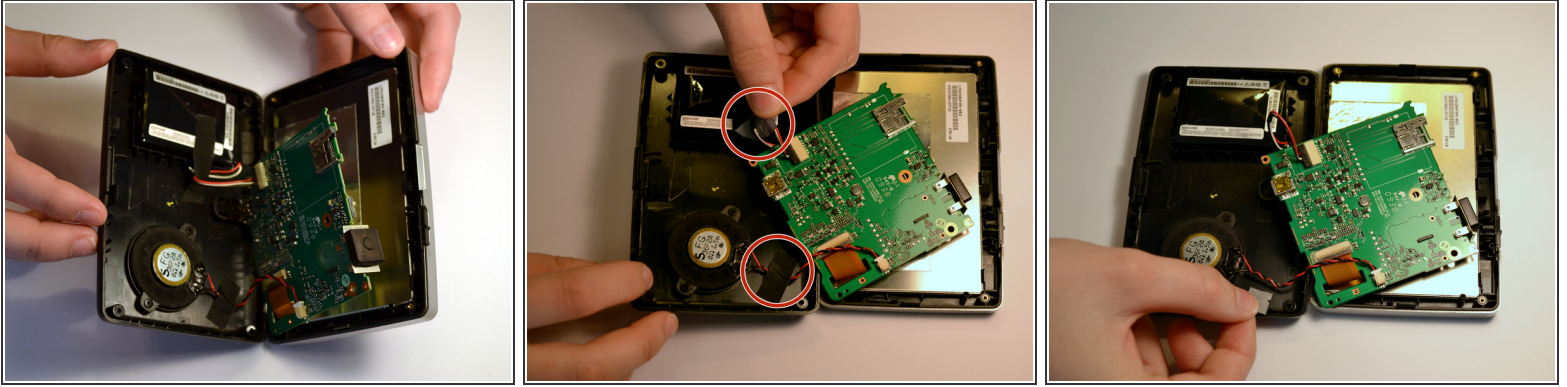

- Fully separate the two sides of the case.
- Locate the tape on the battery wires and the tape on the speaker wires. Remove both pieces of tape.



## Step 6 — Battery

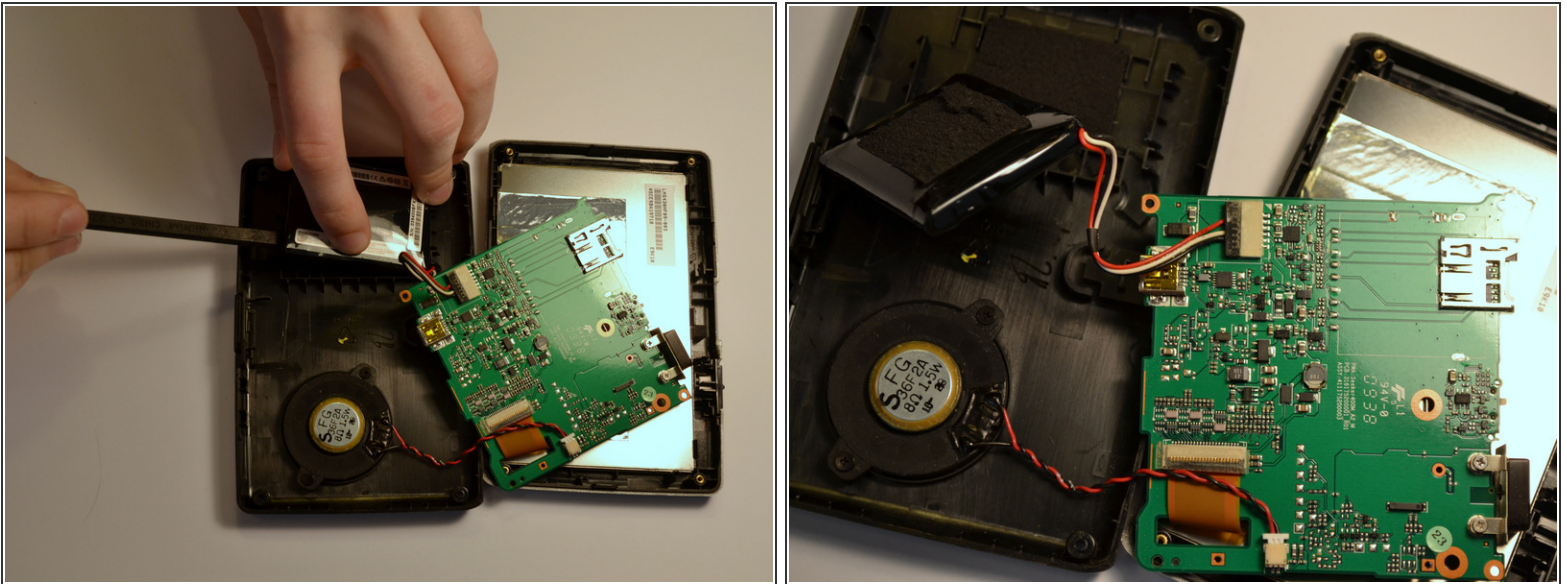

- Use the black spudger to break the seal between the adhesive and battery. Use the same spudger to continue to pry the battery from the backing
-  This may be a little tough to separate the battery and the adhesive





## Step 7

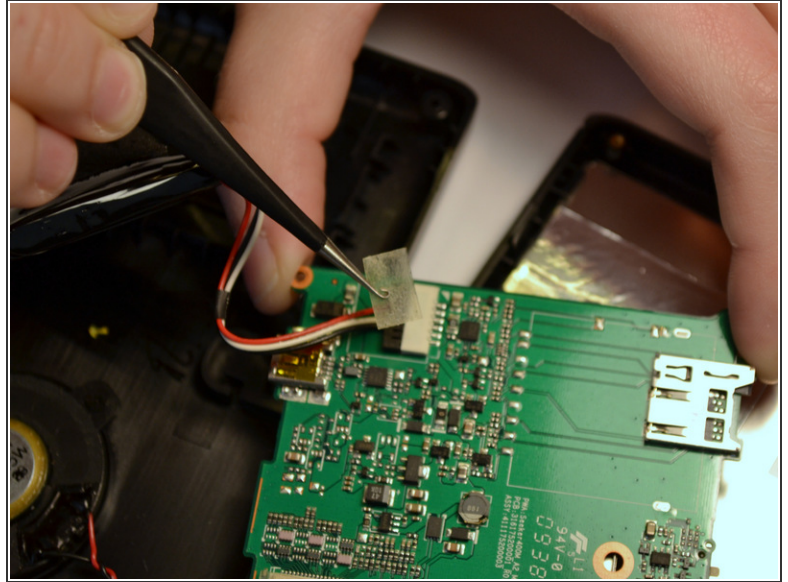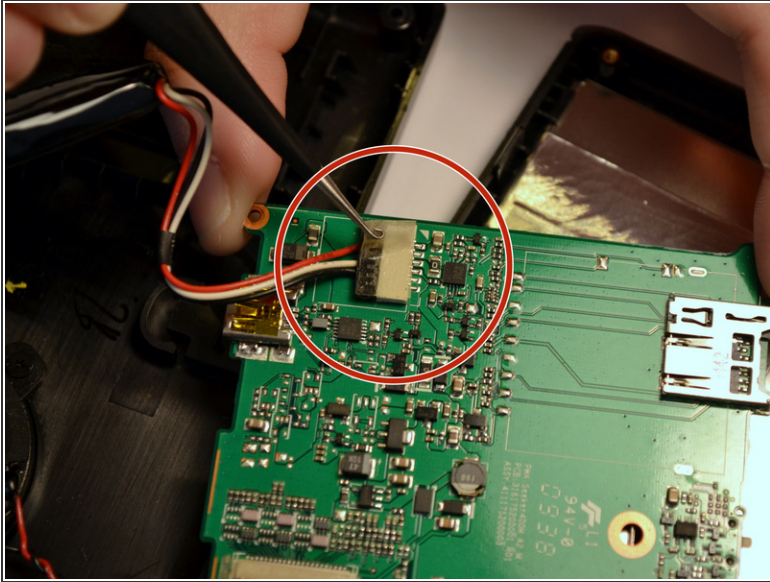

- Lift the battery from the device
- Once the battery is free from the adhesive, remove the piece of tape with a pair of tweezers that is covering the connection of the battery to the motherboard.

## Step 8

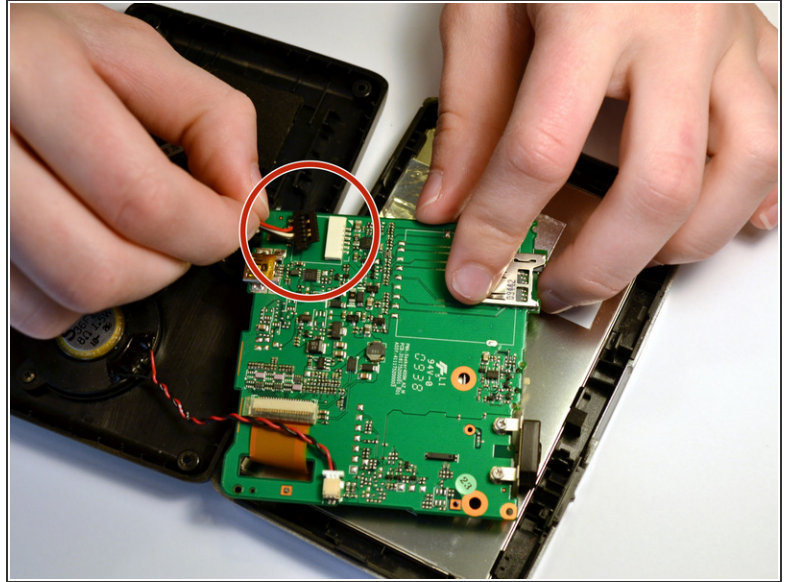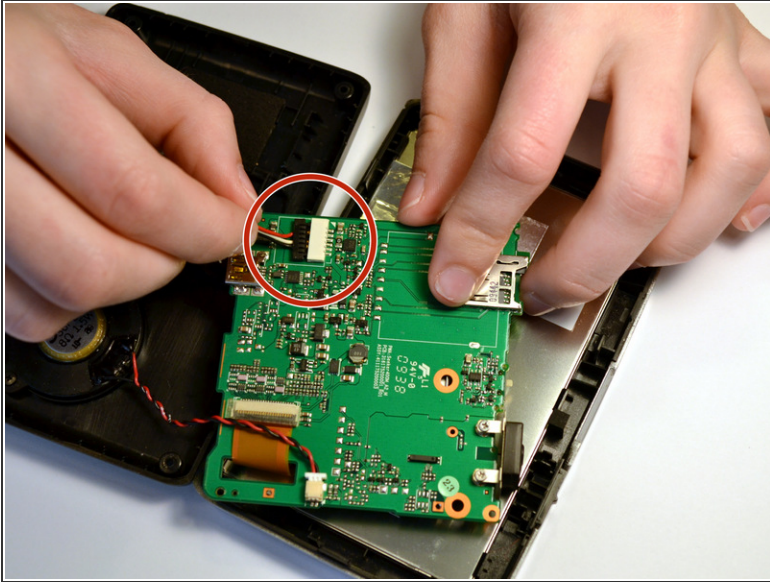


- Unplug the battery from the mother board by pulling back the clips and pulling the wires away from the motherboards receptacle

⚠ It is important for your and the device's safety to remove the battery before continuing with any other part removals.


i It is not necessary to separate the red and white wires from the battery. A replacement battery pack will come with similar wires already attached.

## Step 9 — Antenna

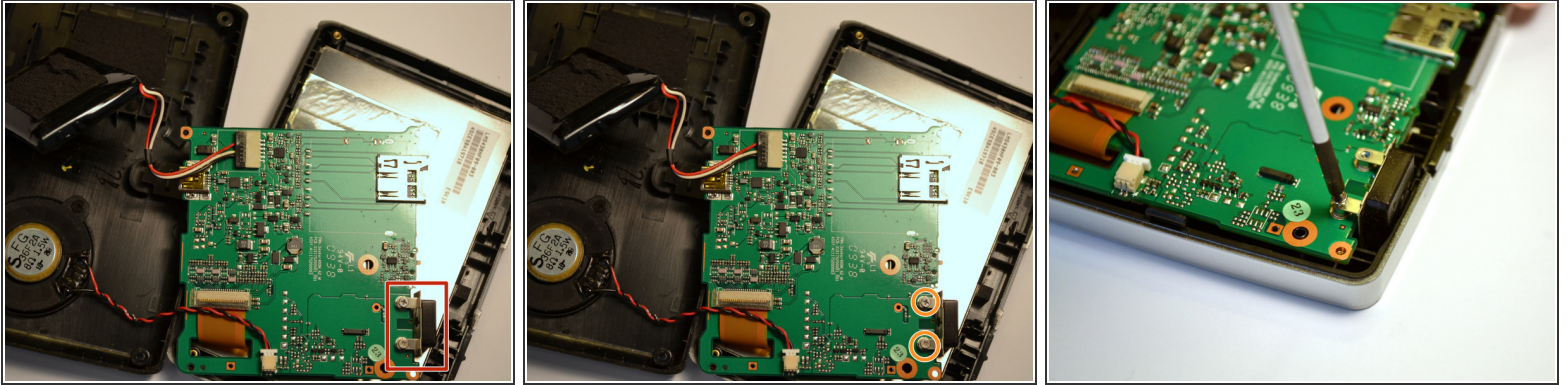

- Identify the antenna.
- Locate the two screws in the antenna.
- Use a Phillips #0 screwdriver to remove the two 2.5mm Phillips #0 screws.

## Step 10

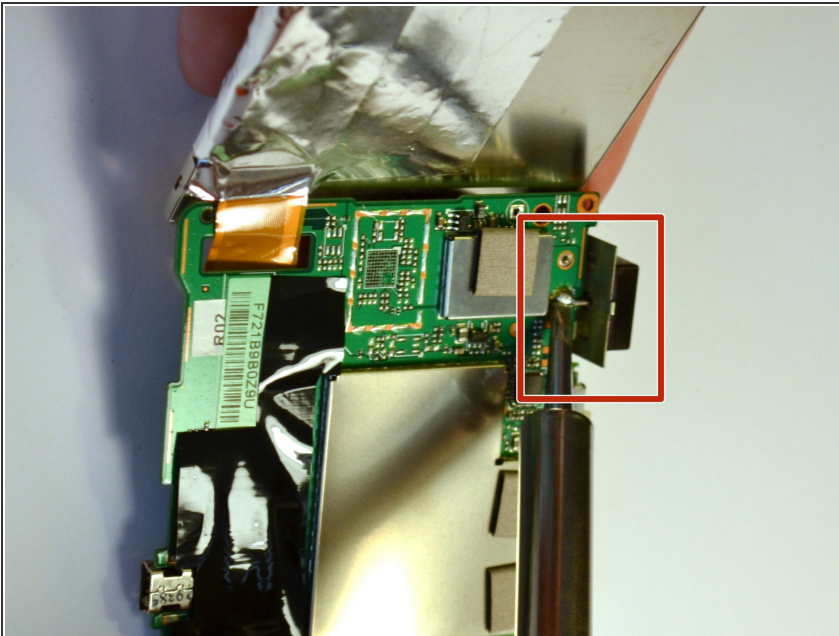

- After the screws have been removed, move the motherboard so that it is sitting in the side with the speaker and battery.
- Using a soldering iron, melt the solder connecting the antenna to the motherboard. For instructions on how to use the soldering iron, refer to [Soldering Technique Guide](#) for instructions.

⚠ The soldering iron will be hot. Handle it with caution.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-31 02:50:46 AM.